
[illegible]

NOTE: ALL VOLTAGE MEASUREMENTS TAKEN TO CHASSIS WITH 20,000 OHM/VOLT METER.

No.	COILS
71	BC ANTENNA COIL.
72	H.F. ANTENNA COIL.
73	BC OSCILLATOR COIL.
74	H.F. OSCILLATOR COIL.
75	1ST I.F. TRANSFORMER
76	2ND I.F. TRANSFORMER
77	OUT PUT TRANSFORMER COIL.
78	PM SPEAKER
79	BAND SELECTOR SWITCH.
82	ON-OFF SWITCH ON TONE CONTROL

ALIGNMENT—PROCEED IN SEQUENCE LISTED.

Band	Band Switch Setting	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment
2nd I.F.	B.C.	.05 mfd.	Grid of INCGT/G	1650 K.C.	455 K.C.	C-8	Maximum Output
Check of 2nd I.F.	B.C.	.05 mfd.	Grid of INCGT/G	1650 K.C.	455 K.C.		Maximum Output
Converter Grid	B.C.	.05 mfd.	Grid of IAYGT/G	1650 K.C.	455 K.C.	C-7	Maximum Output
1450 K.C.	B.C.	200 mmfd.	Antenna	1400 K.C.	1400 K.C.	C-5 C-2	Maximum Output
600 K.C.	B.C.	200 mmfd.	Antenna	600 K.C.	600 K.C.	C-10	Maximum Output
16 M.C.	S.W.	400 ohm	Antenna	16 M.C.	16 M.C.	C-6 C-4	Maximum Output
6 M.C.	S.W.	400 ohm	Antenna	6 M.C.	6 M.C.	C-9	Maximum Output

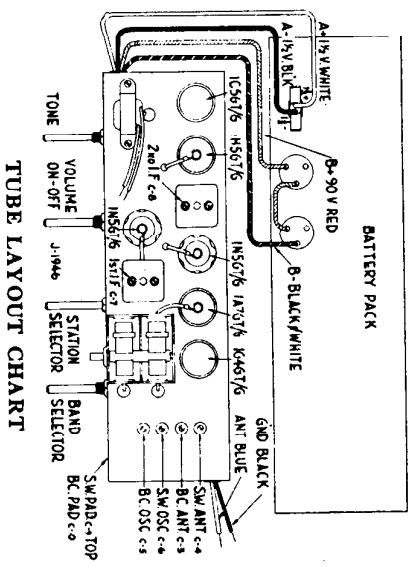

**BATTERY MODEL
CHASSIS EBT-4626
46-03**